




BL BASIC



Body: Injection aluminium
Diffuser: Shock-proof, tempered and ground glass with serigraphic printing
Led: High-Efficient Power LED
Protection: IP66

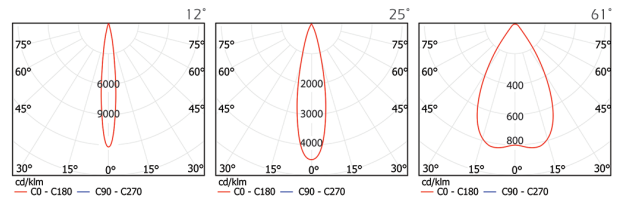

Code	Box Dimension	Weight
HCL/B	440x480x190mm	12,000gr

Code	System Power	System Luminous Flux	Lens Angles	Color Temperature
BL/B 45	45W	4.480lm(6.500K)	12°-25°-61°	3000-4000-5000K-RGB R-G-B-A
BL/B 65	65W	6.800lm(6.500K)	12°-25°-61°	3000-4000-5000K-RGB R-G-B-A

Luminaire working temperature(driver included) is -35°C ~ +50°C



Lenses with high light transmittance are made from acrylic. The lens material is polycarbonate.